




VELVEDARK 06

VELVEDARK 3.05 ULTRADARK COL06

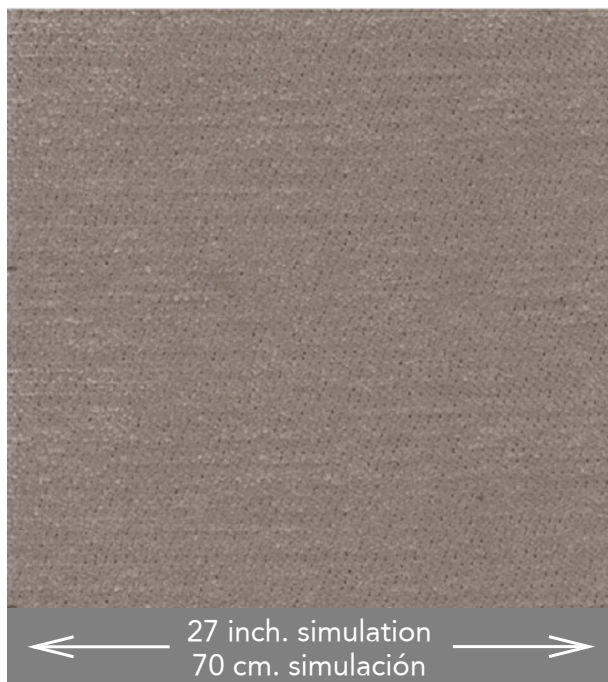

REPEAT WEFT REPETICIÓN TRAMA:
REPEAT WARP REPETICIÓN URDIMBRE:

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	120 / 305	
HS CODE / PARTIDA ARANCELARIA		
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	27.5 / 25	
COMPOSITION / COMPOSICION	100% PES FR	
WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)	16.48 / 560	
WEIGHT (oz/yd) / PESO (gr/ml)	54.83 / 1700.00	
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ (grados) (1-8)	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO (grados)	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	0.5	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	0.5	UNE EN ISO 5077
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA URDIMBRE (mm)	1	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA (mm)	1	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 13773:2003	C1	UNE EN 13773:2003
OPACITY 100000 LUX / OPACIDAD 100000 LUX	0.0 - 0.18	CS1451LUX