




# NAUTICO .C-14

NAUTICO 1.60 JARDIN C-14 VERDE

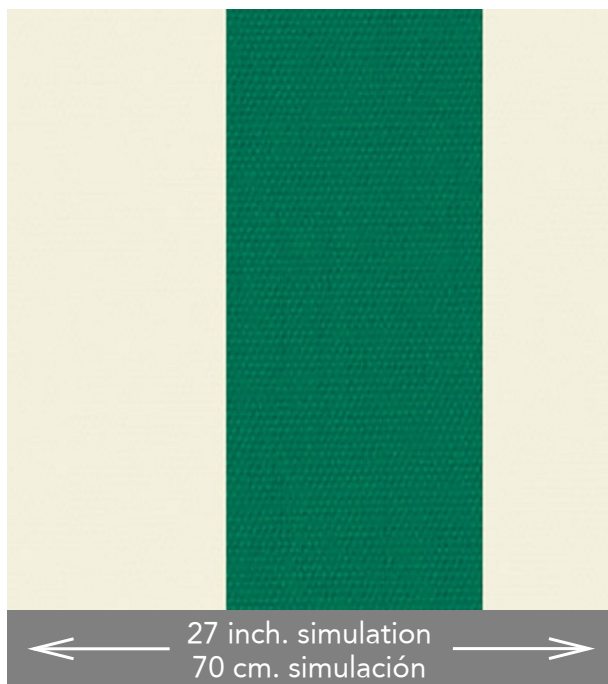

REPEAT WEFT REPETICIÓN TRAMA: ...  
REPEAT WARP REPETICIÓN URDIMBRE: 4 inches - 10 cm

## TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

|                                                                                |                                                |                       |
|--------------------------------------------------------------------------------|------------------------------------------------|-----------------------|
| WIDTH (inches) / ANCHO (cm)                                                    | 63 / 160                                       |                       |
| HS CODE / PARTIDA ARANCELARIA                                                  | 55152190                                       |                       |
| ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)                                          | 38.5 / 35                                      |                       |
| COMPOSITION / COMPOSICION                                                      | 100% ACRILICO/100%ACRYLIC                      |                       |
| WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)                                         | 5.59 / 190                                     |                       |
| WEIGHT (oz/yd) / PESO (gr/ml)                                                  | 9.80 / 304.00                                  |                       |
| ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN ( ciclos )            | 20000                                          | UNE EN ISO 12947-2    |
| PILLING RESISTANCE ( degrees ) (1-5) / RESISTENCIA AL PILLING ( grados ) (1-5) | 4-5                                            | UNE EN ISO 12945-2    |
| COLOUR FASTNESS TO LIGHT ( degrees ) (1-8) / SOLIDEZ A LA LUZ ( grados ) (1-8) | 5-6                                            | UNE EN ISO 105-B02    |
| COLOUR FASTNESS TO RUBBING ( degrees ) (1-5) / SOLIDEZ AL FROTE ( grados )     | 4-5                                            | UNE EN ISO 105-X12    |
| COLOUR FASTNESS TO WASH ( degrees ) (1-5) / SOLIDEZ AL LAVADO ( grados )       | 5                                              | UNE EN ISO 105-C06    |
| (%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE ( % )                               | 0.0                                            | UNE EN ISO 5077.      |
| (%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA ( % )                                  | 2.5                                            | UNE EN ISO 5077       |
| WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA URDIMBRE (mm)            | 3.60                                           | UNE EN ISO 13936-1    |
| WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA ( mm )             | 3.60                                           | UNE EN ISO 13936-1    |
| WATER PENETRATION RESISTANCE. TEST UNDER PRESSURE ( WATER COLUMN )             | 11                                             | UNE EN ISO 20811:1993 |
| RESISTANT / RESISTENTES                                                        | TEFLON STAIN RESISTANT /<br>ANTIMANCHAS TEFLÓN |                       |