


DETROIT 34

DETROIT 2,80 AMERICA COL.34

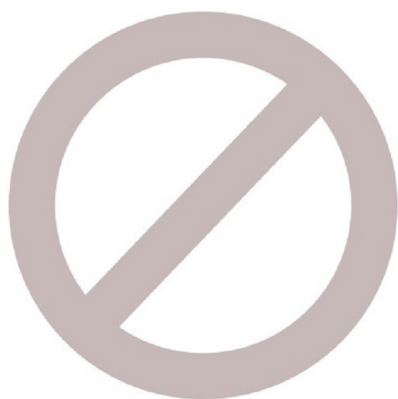

← 27 inch. simulation →
70 cm. simulación

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35 cm
REPEAT WARP REPETICIÓN URDIMBRE: 10 inches - 26 cm

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
HS CODE / PARTIDA ARANCELARIA	58012600	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PES60% CO40%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)	8.83 / 300	
WEIGHT (oz/yd) / PESO (gr/ml)	27.09 / 840.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN (ciclos)	25000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING (1-5)	4-5	UNE EN ISO 12945-2
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE (1-5)	4-5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO (1-5)	4-5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	1	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	3	UNE EN ISO 5077