


# NEW ETAMIN BEIG

## NEW ETAMIN VISILLO 3,00 BEIG

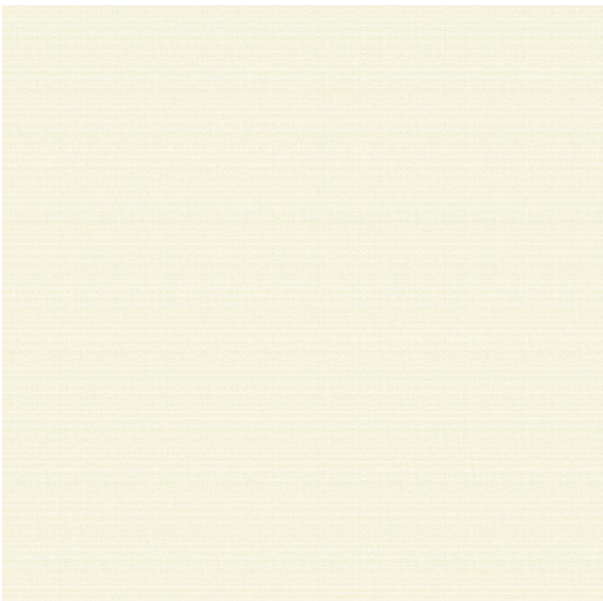

← 27 inch. simulation 70 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: ----  
 REPEAT WARP REPETICIÓN URDIMBRE: ----

### TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	118 / 300	
HS CODE / PARTIDA ARANCELARIA	55132100	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	44.0 / 40	
COMPOSITION / COMPOSICION	PES65% CO35%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+-5%)	2.06 / 70	
WEIGHT (oz/yd) / PESO (gr/ml)	6.77 / 210.00	
COLOUR FASTNESS TO LIGHT ( degrees ) (1-8) / SOLIDEZ A LA LUZ ( grados ) (1-8)	4-5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING ( degrees ) (1-5) / SOLIDEZ AL FROTE ( grados )	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH ( degrees ) (1-5) / SOLIDEZ AL LAVADO ( grados )	4-5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE ( % )	1	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA ( % )	2	UNE EN ISO 5077