




## PUIG CRUDO

PUIG EN 2,80 LEVANTE CRUDO

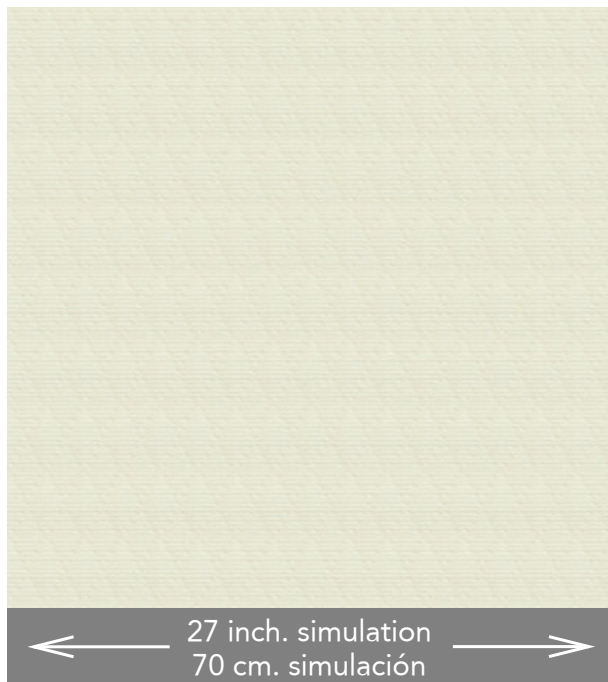

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35.1 cm  
REPEAT WARP REPETICIÓN URDIMBRE: 22 inches - 54.8 cm

## TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

|                                                                                |                 |                    |
|--------------------------------------------------------------------------------|-----------------|--------------------|
| WIDTH (inches) / ANCHO (cm)                                                    | 110 / 280       |                    |
| HS CODE / PARTIDA ARANCELARIA                                                  | 55151290        |                    |
| ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)                                          | 33.0 / 30       |                    |
| COMPOSITION / COMPOSICION                                                      | PES100%         |                    |
| WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)                                         | 11.19 / 380     |                    |
| WEIGHT (oz/yd) / PESO (gr/ml)                                                  | 34.31 / 1064.00 |                    |
| ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN ( ciclos )            | 8000            | UNE EN ISO 12947-2 |
| PILLING RESISTANCE ( degrees ) (1-5) / RESISTENCIA AL PILLING ( grados ) (1-5) | 5               | UNE EN ISO 12945-2 |
| (%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE ( % )                               | 2.4             | UNE EN ISO 5077.   |
| (%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)                                    | 0               | UNE EN ISO 5077    |
| FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1                             | PASA            | UNE EN 1021:2014-1 |
| FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1                                      | PASA            | BS 5852-1          |