


# BLACKSAN III FR CRU CRUDO

## BLACKSAN F III 2.90 FR CRUDO

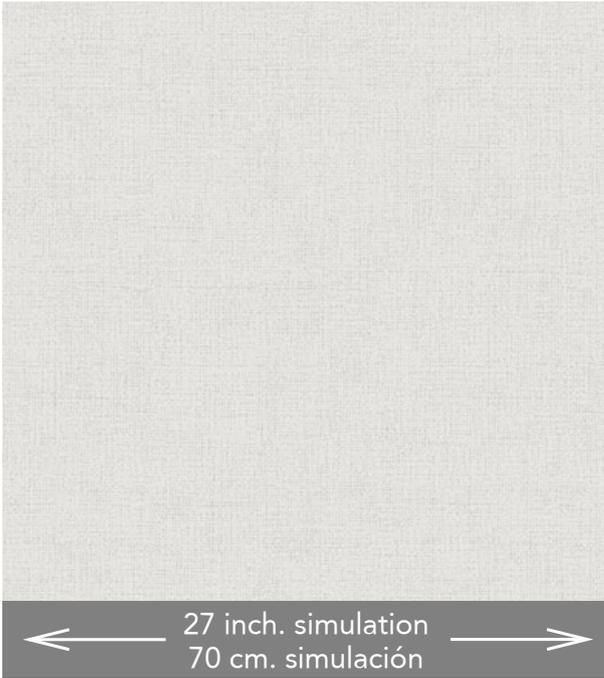

REPEAT WEFT REPETICIÓN TRAMA:  
REPEAT WARP REPETICIÓN URDIMBRE:

\* **SPECIAL MAINTENANCE / MANTENIMIENTO ESPECIAL** = IRON ONLY ON THE TEXTILE SIDE / PLANCHAR SOLO POR LA CARA TEXTIL

### TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	114 / 290	
HS CODE / PARTIDA ARANCELARIA	59039099	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	44.0 / 40	
COMPOSITION / COMPOSICION	PES100%/BACKING ACRYLIC 100%	
WEIGHT (oz/yd <sup>2</sup> ) / PESO (gr/m <sup>2</sup> ) (+-5%)	8.24 / 280	
WEIGHT (oz/yd) / PESO (gr/ml)	26.19 / 812.00	
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ (grados) (1-8)	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE (grados)	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO (grados)	5	UNE EN ISO 105-C06
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 13773:2003	C-1	UNE EN 13773:2003
OPACITY (%) / OPACIDAD (%)	100	NF G 07-162 / TAPPI T425