



# SUN 06

## SUN 1.40 VANIA COL.06

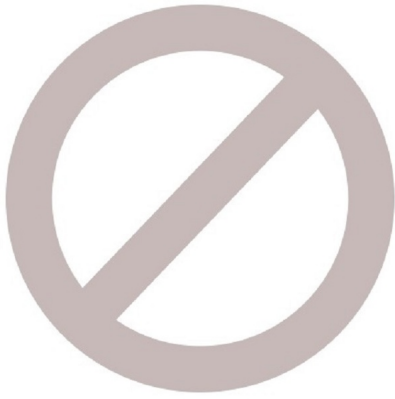

← 27 inch. simulation →  
← 70 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 6 inches - 16 cm  
REPEAT WARP REPETICIÓN URDIMBRE: 15 inches - 38 cm

### TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	55 - 110 / 140 - 280	
HS CODE / PARTIDA ARANCELARIA	52115100	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	27.5	
COMPOSITION / COMPOSICION	PES55% CO45%	
WEIGHT (oz/yd) / PESO (gr/ml)	9.12 / 310	
WEIGHT (oz/yd) / PESO (gr/ml)	14.00 - 27.99 / 434.00 - 868.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN ( ciclos )	>40000	UNE EN ISO 12947-2
PILLING RESISTANCE ( degrees ) (1-5) / RESISTENCIA AL PILLING ( grados ) (1-5)	5	UNE EN ISO 12945-2
COLOUR FASTNESS TO LIGHT ( degrees ) (1-8) / SOLIDEZ A LA LUZ ( grados ) (1-8)	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING ( degrees ) (1-5) / SOLIDEZ AL FROTE ( grados )	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH ( degrees ) (1-5) / SOLIDEZ AL LAVADO ( grados )	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE ( % )	2	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA ( % )	3	UNE EN ISO 5077
	1500	UNE EN ISO 13934-1
WEFT TENSILE STRENGTH ( N ) / RESISTENCIA A LA TRACCIÓN TRAMA ( N )	541.39	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK ( mm ) / ALARGAMIENTO HASTA LA ROTURA	68.9	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK ( mm ) / ALARGAMIENTO HASTA LA ROTURA TRAMA	22.3	UNE EN ISO 13934-1
WARP TEARING STRENGTH ( N )	>150	UNE EN ISO 13937-3
WEFT TEARING STRENGTH ( N ) / RESISTENCIA AL RASGADO TRAMA ( N )	105.09	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE ( mm ) / DESLIZAMIENTO DE LA COSTURA URDIMBRE ( mm )	2.9	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE ( mm ) / DESLIZAMIENTO DE LA COSTURA TRAMA ( mm )		UNE EN ISO 13936-1
	PASA	UNE EN 1021:2014-1 BS 5852-1