




REMO 15

REMO 2,80 EPIC COL.15

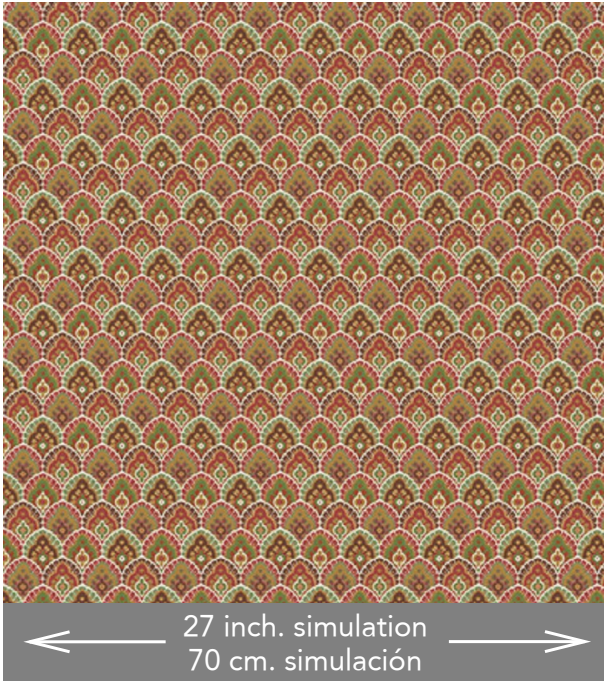

REPEAT WEFT REPETICIÓN TRAMA: 4 inches - 9 cm
REPEAT WARP REPETICIÓN URDIMBRE: 5 inches - 12.5 cm

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

HS CODE / PARTIDA ARANCELARIA	110 - 55 / 280 - 140	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	54078300	
COMPOSITION / COMPOSICION	27.5 / 25	
WEIGHT (oz/yd) / PESO (gr/ml)	11.63 / 395	
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING (grados) (1-5)	35.67 - 17.83 / 1106.00 - 553.00	UNE EN ISO 12947-2
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ (grados) (1-8)	15000	UNE EN ISO 12945-2
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE (grados) (1-5)		UNE EN ISO 105-B02
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)		UNE EN ISO 105-X12
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)		UNE EN ISO 105-C06
WEFT TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA (N)		UNE EN ISO 5077.
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA ROTURA		UNE EN ISO 5077
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA ROTURA TRAMA		UNE EN ISO 13934-1
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA URDIMBRE (mm)		UNE EN ISO 13934-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA (mm)		UNE EN ISO 13934-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1		UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1		UNE EN 1021:2014-1