




AMBER 90

AMBER 2,80 PIQUE COL.90

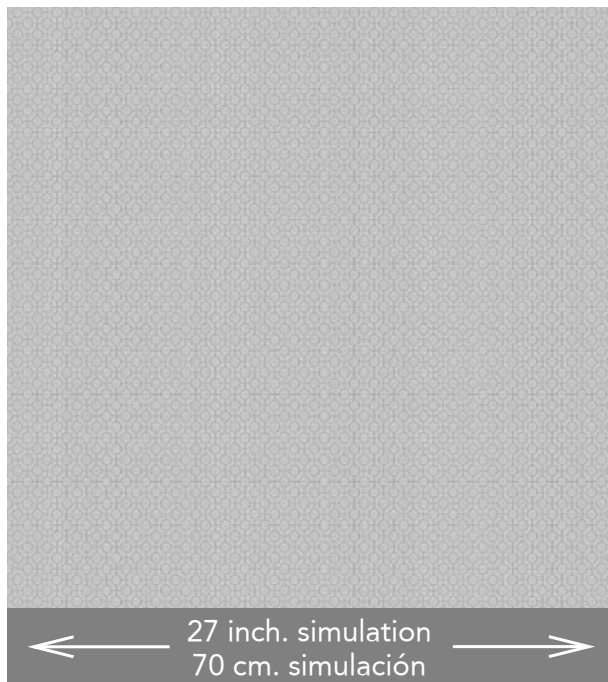

REPEAT WEFT REPETICIÓN TRAMA: 1 inches - 2.3 cm
REPEAT WARP REPETICIÓN URDIMBRE: 1 inches - 2.4 cm

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 - 55 / 280 - 140	
HS CODE / PARTIDA ARANCELARIA	54079300	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PES75% CO25%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)	8.09 / 275	
WEIGHT (oz/yd) / PESO (gr/ml)	24.83 - 12.42 / 770.00 - 385.00	
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING (grados) (1-5)	5	UNE EN ISO 12945-2
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ (grados) (1-8)	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE (grados)	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO (grados)	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	2.8	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	2	UNE EN ISO 5077