




MILANO 15

MILANO 2,80 MILANO COL.15

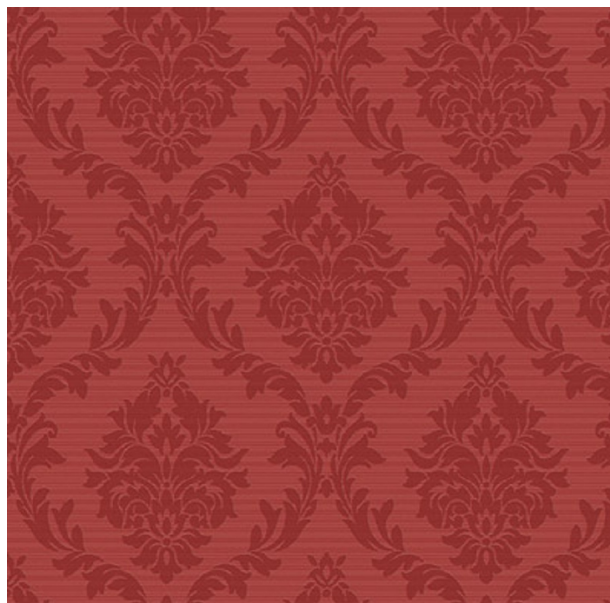


"S"



UPHOLSTERY
Tapicería



**FIRE
RETARDANT**
EN 1021-1:2014
NFPA 260
CAL TB 117
BS 5852-1



← 27 inch. simulation →
← 70 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA:
REPEAT WARP REPETICIÓN URDIMBRE:

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
HS CODE / PARTIDA ARANCELARIA	52113900	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PES80% CO20%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)	8.68 / 295	
WEIGHT (oz/yd) / PESO (gr/ml)	26.64 / 826.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN (ciclos)	15000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING (grados) (1-5)	5	UNE EN ISO 12945-2
VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)	5	CS4946
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ (grados) (1-8)	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE (grados)	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO (grados)	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	2.6	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	1	UNE EN ISO 5077
	PASA	BS 5852-1