



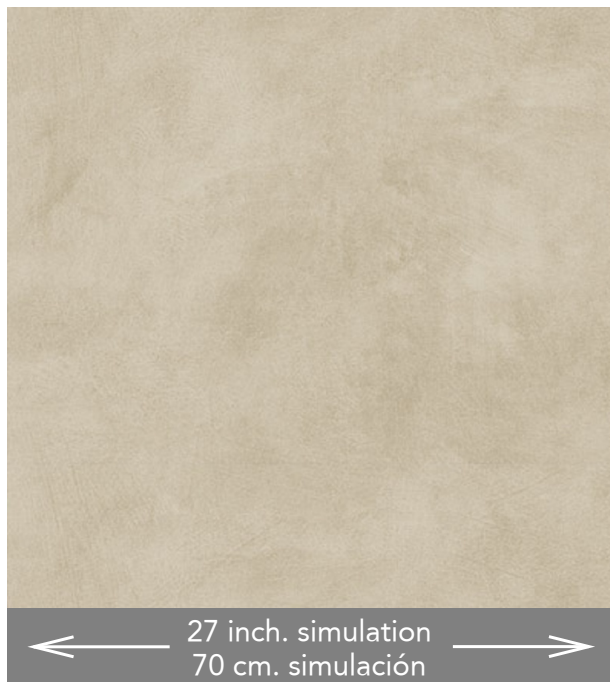

MAR DESERT

MAR 1,40 POLIPIEL COL.DESERT



**FIRE
RETARDANT**
EN 1021-1:2014
NFPA 260
CAL TB 117
BS 5852-1



REPEAT WEFT REPETICIÓN TRAMA: 16 inches - 40 cm
REPEAT WARP REPETICIÓN URDIMBRE: 14 inches - 35 cm

* **SPECIAL MAINTENANCE / MANTENIMIENTO ESPECIAL** = / NO UTILIZAR DISOLVENTES NI ALCOHOL

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	55 / 140	
HS CODE / PARTIDA ARANCELARIA	39211200	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PVC84% PES12% ResinaPAN4%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)	17.07 / 580 26.19 / 812.00	
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / S.LUZ A LA INTEMPERIE (grados)	5 6-7	UNE EN ISO 12947-2
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE (grados)	5	UNE EN ISO 12945-2
WARP TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN URDIMBRE (N)	360	UNE EN ISO 105-B04
WEFT TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA (N)	150	UNE EN ISO 105-X12
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO URDIMBRE (N)	23 26	UNE EN ISO 13934-1 UNE EN ISO 13934-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN ISO 13937-3 UNE EN ISO 13937-3
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	UNE EN 1021:2014-1 BS 5852-1
RESISTANT / RESISTENTES	STAIN RESISTANT / ANTIMANCHAS	