




# COSMODARK BCO

## COSMODARK 3.10 ULTRADARK BCO

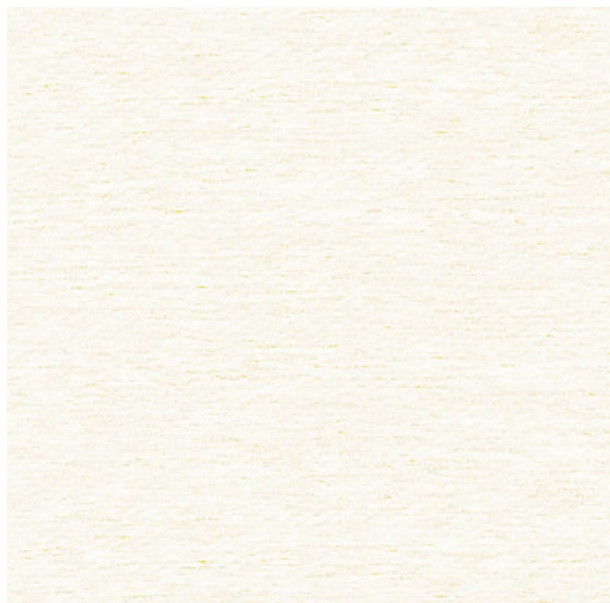

← 27 inch. simulation →  
← 70 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA:  
REPEAT WARP REPETICIÓN URDIMBRE:

## TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

|                                                                                |                 |                    |
|--------------------------------------------------------------------------------|-----------------|--------------------|
| WIDTH (inches) / ANCHO (cm)                                                    | 122 / 310       |                    |
| HS CODE / PARTIDA ARANCELARIA                                                  | 54075300        |                    |
| ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)                                          | 33.0 / 30       |                    |
| COMPOSITION / COMPOSICION                                                      | PES FR 100%     |                    |
| WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)                                         | 15.13 / 514     |                    |
| WEIGHT (oz/yd) / PESO (gr/ml)                                                  | 51.39 / 1593.40 |                    |
| COLOUR FASTNESS TO LIGHT ( degrees ) (1-8) / SOLIDEZ A LA LUZ ( grados ) (1-8) | 5               | UNE EN ISO 105-B02 |
| COLOUR FASTNESS TO WASH ( degrees ) (1-5) / SOLIDEZ AL LAVADO ( grados )       | 5               | UNE EN ISO 105-C06 |
| (%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE ( % )                               | 1.2             | UNE EN ISO 5077.   |
| (%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA ( % )                                  | 0.4             | UNE EN ISO 5077    |
| WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA URDIMBRE (mm)            | 0.3             | UNE EN ISO 13936-1 |
| WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA ( mm )             | 0.3             | UNE EN ISO 13936-1 |
| FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 13773:2003                              | C1              | UNE EN 13773:2003  |
| OPACITY 100000 LUX / OPACIDAD 100000 LUX                                       | 0.02            | CS1451LUX          |