




PANAMERA 46

PANAMERA 2,80 IGNÍF HILO C.46

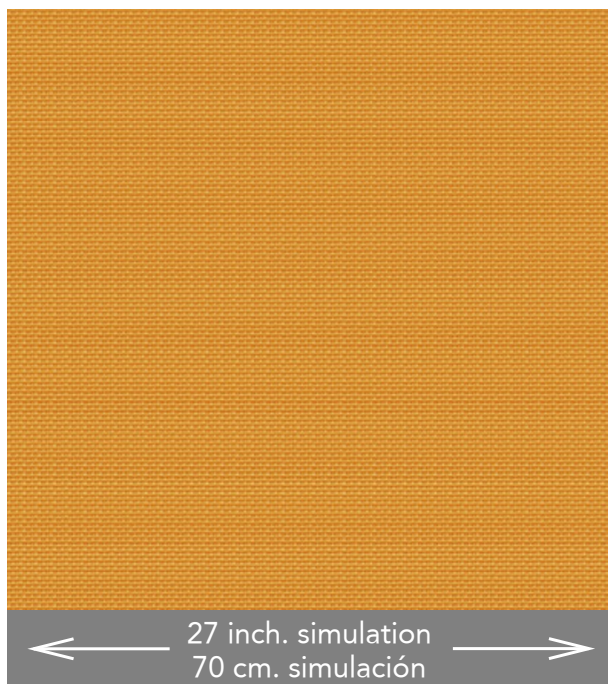

**FIRE
RETARDANT**
EN 13773:2003
NFPA 701
BS 5867-2



EASY CLEAN
Fácil limpieza



**CONFIDENCE
IN TEXTILES**
Tested for harmful substances
according to Oeko-Tex® Standard 100
981699 ATEX

REPEAT WEFT REPETICIÓN TRAMA:
REPEAT WARP REPETICIÓN URDIMBRE:

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	110 / 280	
HS CODE / PARTIDA ARANCELARIA	54075200	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PES100%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)	7.06 / 240	
WEIGHT (oz/yd) / PESO (gr/ml)	21.67 / 672.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN (ciclos)	36000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING (grados) (1-5)	4	UNE EN ISO 12945-2
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ (grados) (1-8)	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE (grados)	5	UNE EN ISO 105-X12
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO (grados)	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	0.6	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	0	UNE EN ISO 5077
WARP TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN URDIMBRE (N)	1064.37	UNE EN ISO 13934-1
WEFT TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA (N)	1149.92	UNE EN ISO 13934-1
WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA ROTURA	74.4	UNE EN ISO 13934-1
WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA ROTURA TRAMA	44.87	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO URDIMBRE (N)	65.11	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	60.59	UNE EN ISO 13937-3
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA URDIMBRE (mm)	2.2	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA (mm)	1.6	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 13773:2003	C-1	UNE EN 13773:2003