




# KOSAMUI 85

KOSAMUI 1.40 KAOKO COL.85

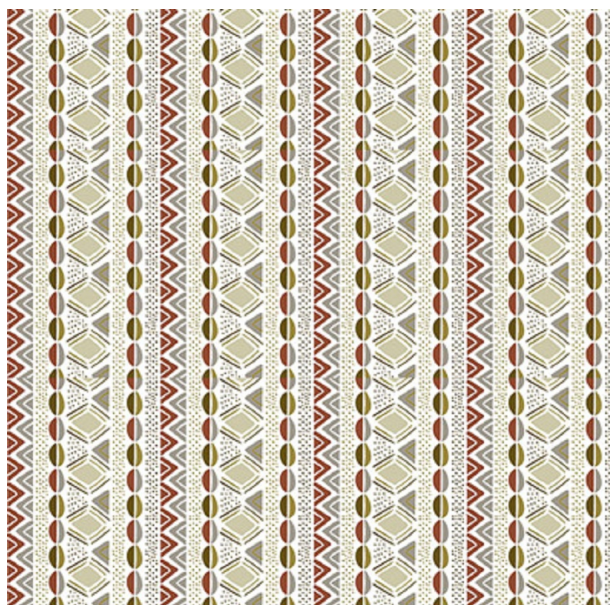

← 27 inch. simulation 70 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 7 inches - 17.5 cm  
REPEAT WARP REPETICIÓN URDIMBRE: 9 inches - 23 cm

## TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

|                                                                                |                                 |                    |
|--------------------------------------------------------------------------------|---------------------------------|--------------------|
| WIDTH (inches) / ANCHO (cm)                                                    | 55 - 110 / 140 - 280            |                    |
| HS CODE / PARTIDA ARANCELARIA                                                  | 52115100                        |                    |
| ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)                                          | 27.5 / 25                       |                    |
| COMPOSITION / COMPOSICION                                                      | PES60% CO40%                    |                    |
| WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)                                         | 9.71 / 330                      |                    |
| WEIGHT (oz/yd) / PESO (gr/ml)                                                  | 14.90 - 29.80 / 462.00 - 924.00 |                    |
| ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN ( ciclos )            | >40000                          | UNE EN ISO 12947-2 |
| PILLING RESISTANCE ( degrees ) (1-5) / RESISTENCIA AL PILLING ( grados ) (1-5) | 5                               | UNE EN ISO 12945-2 |
| VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)                                      | 5                               | CS4946             |
| COLOUR FASTNESS TO LIGHT ( degrees ) (1-8) / SOLIDEZ A LA LUZ ( grados ) (1-8) | 5                               | UNE EN ISO 105-B02 |
| COLOUR FASTNESS TO RUBBING ( degrees ) (1-5) / SOLIDEZ AL FROTE ( grados )     | 5                               | UNE EN ISO 105-X12 |
| COLOUR FASTNESS TO WASH ( degrees ) (1-5) / SOLIDEZ AL LAVADO ( grados )       | 5                               | UNE EN ISO 105-C06 |
| (%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE ( % )                               | 2.2                             | UNE EN ISO 5077.   |
| (%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA ( % )                                  | 1.4                             | UNE EN ISO 5077    |
| WARP TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN URDIMBRE (N)             | 1499.51                         | UNE EN ISO 13934-1 |
| WEFT TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA (N)                | 963.9                           | UNE EN ISO 13934-1 |
| WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA ROTURA                    | 58.20                           | UNE EN ISO 13934-1 |
| WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA ROTURA TRAMA              | 27.3                            | UNE EN ISO 13934-1 |
| WARP TEARING STRENGTH ( N ) / RESISTENCIA AL RASGADO URDIMBRE ( N )            | 162.7                           | UNE EN ISO 13937-3 |
| WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)                   | 91.97                           | UNE EN ISO 13937-3 |
| WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA URDIMBRE (mm)            | 2.3                             | UNE EN ISO 13936-1 |
| WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA ( mm )             | 3.5                             | UNE EN ISO 13936-1 |
| FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1                             | PASA                            | UNE EN 1021:2014-1 |
| FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1                                      | PASA                            | BS 5852-1          |