




KARMA 2,80 KARMA COL.50

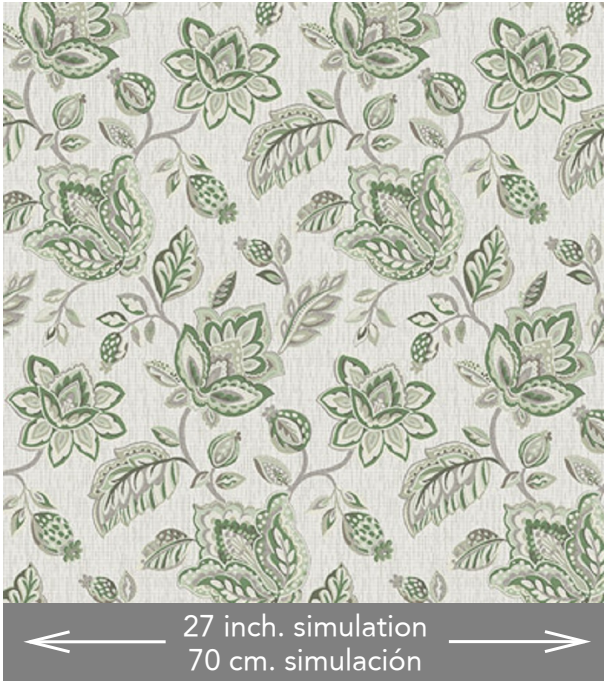

## UPHOLSTERY

Tapicería



**CURTAINS**  
Cortinas



**CUSHIONS**  
Cojines



**FIRE  
RETARDANT**  
EN 1021-1:2014  
NFPA 260  
CAL TB 117  
BS 5852-1



**Tested for harmful substances**  
according to Oeko-Tex® Standard 100  
981699 AITEX

27 inch. simulation  
70 cm. simulación

REPEAT WEFT    REPETICIÓN TRAMA: 14 inches - 35.5 cm  
REPEAT WARP    REPETICIÓN URDIMBRE: 30 inches - 75.8 cm

## TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

|                                                                                |                    |                    |
|--------------------------------------------------------------------------------|--------------------|--------------------|
| WIDTH (inches) / ANCHO (cm)                                                    | 110 / 280          |                    |
| HS CODE / PARTIDA ARANCELARIA                                                  | 54078300           |                    |
| ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)                                          | 33.0 / 30          |                    |
| COMPOSITION / COMPOSICION                                                      | PES62% CO33% PAN5% |                    |
| WEIGHT (oz/yd2) / PESO (gr/m2) (+-5%)                                          | 9.42 / 320         |                    |
| WEIGHT (oz/yd) / PESO (gr/ml)                                                  | 28.90 / 896.00     |                    |
| ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN ( ciclos )            | 15000              | UNE EN ISO 12947-2 |
| PILLING RESISTANCE ( degrees ) (1-5) / RESISTENCIA AL PILLING ( grados ) (1-5) | 4                  | UNE EN ISO 12945-2 |
| VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)                                      | 5                  | CS4946             |
| COLOUR FASTNESS TO LIGHT ( degrees ) (1-8) / SOLIDEZ A LA LUZ ( grados ) (1-8) | 5                  | UNE EN ISO 105-B02 |
| COLOUR FASTNESS TO RUBBING ( degrees ) (1-5) / SOLIDEZ AL FROTE ( grados )     | 5                  | UNE EN ISO 105-X12 |
| COLOUR FASTNESS TO WASH ( degrees ) (1-5) / SOLIDEZ AL LAVADO ( grados )       | 5                  | UNE EN ISO 105-C06 |
| (%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE ( % )                               | 3                  | UNE EN ISO 5077.   |
| (%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)                                    | 2.8                | UNE EN ISO 5077    |
| WARP TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN URDIMBRE (N)             | 1011.46            | UNE EN ISO 13934-1 |
| WEFT TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA (N)                | 1143.13            | UNE EN ISO 13934-1 |
| WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA ROTURA                    | 84.05              | UNE EN ISO 13934-1 |
| WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA ROTURA TRAMA              | 63.4               | UNE EN ISO 13934-1 |
| WARP TEARING STRENGTH ( N ) / RESISTENCIA AL RASGADO URDIMBRE ( N )            | 75.66              | UNE EN ISO 13937-3 |
| WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)                   | 168.35             | UNE EN ISO 13937-3 |
| WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA URDIMBRE (mm)            | 2.2                | UNE EN ISO 13936-1 |
| WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA ( mm )             | 2.8                | UNE EN ISO 13936-1 |
| FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1                             | PASA               | UNE EN 1021:2014-1 |
| FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1                                      | PASA               | BS 5852-1          |