




# WAITA 04

WAITA 2.80 AFRICA COL.04

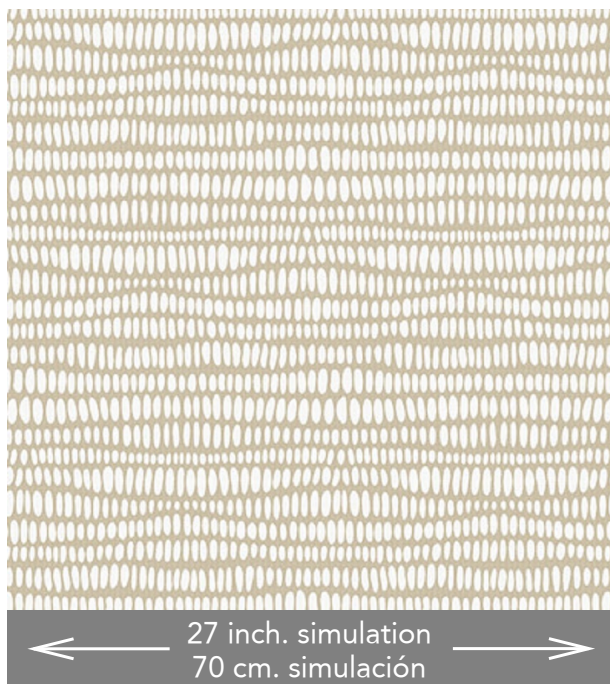

← 27 inch. simulation →  
70 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35.5 cm  
REPEAT WARP REPETICIÓN URDIMBRE: 19 inches - 48.7 cm

## TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

|                                                                                |                     |                    |
|--------------------------------------------------------------------------------|---------------------|--------------------|
| WIDTH (inches) / ANCHO (cm)                                                    | 110 / 280           |                    |
| HS CODE / PARTIDA ARANCELARIA                                                  | 54078300            |                    |
| ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)                                          | 33.0 / 30           |                    |
| COMPOSITION / COMPOSICION                                                      | PES50% PAN25% CO25% |                    |
| WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)                                         | 8.09 / 275          |                    |
| WEIGHT (oz/yd) / PESO (gr/ml)                                                  | 24.83 / 770.00      |                    |
| ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN ( ciclos )            | 15000               | UNE EN ISO 12947-2 |
| PILLING RESISTANCE ( degrees ) (1-5) / RESISTENCIA AL PILLING ( grados ) (1-5) | 4-5                 | UNE EN ISO 12945-2 |
| VELCRO EFFECT (1-5) / EFECTO VELCRO (1-5)                                      | 5                   | CS4946             |
| COLOUR FASTNESS TO LIGHT ( degrees ) (1-8) / SOLIDEZ A LA LUZ ( grados ) (1-8) | 5                   | UNE EN ISO 105-B02 |
| COLOUR FASTNESS TO RUBBING ( degrees ) (1-5) / SOLIDEZ AL FROTE ( grados )     | 5                   | UNE EN ISO 105-X12 |
| COLOUR FASTNESS TO WASH ( degrees ) (1-5) / SOLIDEZ AL LAVADO ( grados )       | 5                   | UNE EN ISO 105-C06 |
| (%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE ( % )                               | 1.8                 | UNE EN ISO 5077.   |
| (%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA ( % )                                  | 2                   | UNE EN ISO 5077    |
| WARP TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN URDIMBRE (N)             | 1071.2              | UNE EN ISO 13934-1 |
| WEFT TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA (N)                | 1327.5              | UNE EN ISO 13934-1 |
| WARP EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA ROTURA                    | 84.95               | UNE EN ISO 13934-1 |
| WEFT EXTENSION AT BREAK (mm) / ALARGAMIENTO HASTA LA ROTURA TRAMA              | 46.8                | UNE EN ISO 13934-1 |
| WARP TEARING STRENGTH ( N ) / RESISTENCIA AL RASGADO URDIMBRE ( N )            | 79.2                | UNE EN ISO 13937-3 |
| WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)                   | 74.3                | UNE EN ISO 13937-3 |
| WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA URDIMBRE (mm)            | 2.4                 | UNE EN ISO 13936-1 |
| WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA ( mm )             | 2.2                 | UNE EN ISO 13936-1 |
| FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1                             | PASA                | UNE EN 1021:2014-1 |
| FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1                                      | PASA                | BS 5852-1          |