


NATUDARK FR 3.10 ULTRADARK 02



**FIRE
RETARDANT**
EN 13773:2003
NFPA 701
BS 5867-2

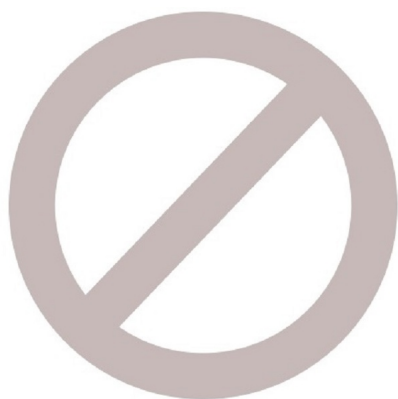

Tested for harmful substances
according to Oeko-Tex® Standard 100
981699 AITEX



REPEAT WEFT
REPEAT WARP

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	122 / 310	
HS CODE / PARTIDA ARANCELARIA	54075200	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	27.5 / 25	
COMPOSITION / COMPOSICION	PES100%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+-5%)	12.07 / 410	
WEIGHT (oz/yd) / PESO (gr/ml)	40.99 / 1271.00	
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / SOLIDEZ A LA LUZ (grados) (1-8)	5	UNE EN ISO 105-B02
COLOUR FASTNESS TO WASH (degrees) (1-5) / SOLIDEZ AL LAVADO (grados)	5	UNE EN ISO 105-C06
(%) WARP SHRINKAGE / ENCOGIMIENTO URDIMBRE (%)	1.2	UNE EN ISO 5077.
(%) WEFT SHRINKAGE / ENCOGIMIENTO TRAMA (%)	0.4	UNE EN ISO 5077
WARP SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA URDIMBRE (mm)	3	UNE EN ISO 13936-1
WEFT SEAM SLIPPAGE (mm) / DESLIZAMIENTO DE LA COSTURA TRAMA (mm)	4.9	UNE EN ISO 13936-1
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 13773:2003	C-1	UNE EN 13773:2003
OPACITY 100000 LUX / OPACIDAD 100000 LUX	0-0.3	CS1451LUX