




OASIS CANDY

OASIS 1,40 POLIPIEL COL.CANDY

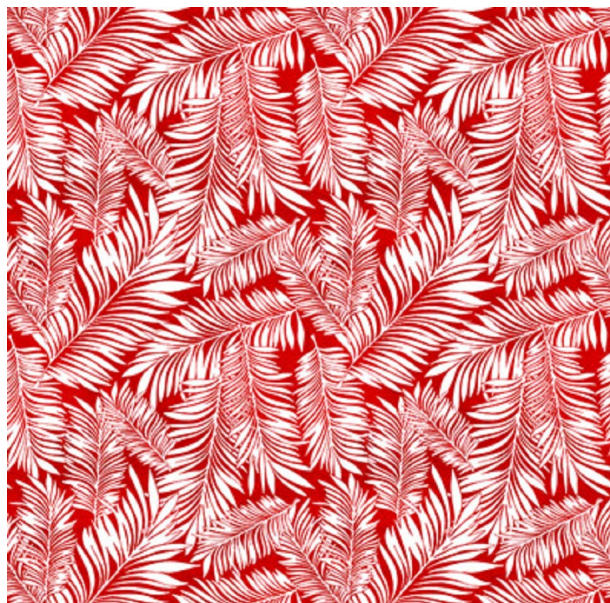

← 27 inch. simulation →
← 70 cm. simulación →

REPEAT WEFT REPETICIÓN TRAMA: 14 inches - 35 cm
REPEAT WARP REPETICIÓN URDIMBRE: 13 inches - 32 cm

* **SPECIAL MAINTENANCE / MANTENIMIENTO ESPECIAL** = / NO UTILIZAR DISOLVENTES NI ALCOHOL

TECHNICAL SHEET / CARACTERÍSTICAS TÉCNICAS

WIDTH (inches) / ANCHO (cm)	55 / 140	
HS CODE / PARTIDA ARANCELARIA	39211200	
ROLL LENGTH (yd) / TAMAÑO PIEZA (mts)	33.0 / 30	
COMPOSITION / COMPOSICION	PVC84% PES12% ResinaPAN4%	
WEIGHT (oz/yd2) / PESO (gr/m2) (+/-5%)	17.07 / 580	
WEIGHT (oz/yd) / PESO (gr/ml)	26.19 / 812.00	
ABRASION RESISTANCE (CYCLES) / RESISTENCIA A LA ABRASIÓN (ciclos)	>45000	UNE EN ISO 12947-2
PILLING RESISTANCE (degrees) (1-5) / RESISTENCIA AL PILLING (grados) (1-5)	5	UNE EN ISO 12945-2
COLOUR FASTNESS TO LIGHT (degrees) (1-8) / S.LUZ A LA INTEMPERIE (grados)	6-7	UNE EN ISO 105-B04
COLOUR FASTNESS TO RUBBING (degrees) (1-5) / SOLIDEZ AL FROTE (grados)	5	UNE EN ISO 105-X12
WARP TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN URDIMBRE (N)	360	UNE EN ISO 13934-1
WEFT TENSILE STRENGTH (N) / RESISTENCIA A LA TRACCIÓN TRAMA (N)	150	UNE EN ISO 13934-1
WARP TEARING STRENGTH (N) / RESISTENCIA AL RASGADO URDIMBRE (N)	23	UNE EN ISO 13937-3
WEFT TEARING STRENGTH (N) / RESISTENCIA AL RASGADO TRAMA (N)	26	UNE EN ISO 13937-3
FIRE RETARDANT RULE / IGNÍFUGOS UNE EN 1021:2014-1	PASA	UNE EN 1021:2014-1
FIRE RETARDANT RULE / IGNÍFUGOS BS 5852-1	PASA	BS 5852-1